

**RICO**<sup>®</sup>  
DESIGN





**Rico Design Creative Melange DK Jumper**

**Size**  
 Bust: 81 [86: 91: 97: 102: 107: 112: 117] cm, 32 [34: 36: 38: 40: 42: 44: 46] in  
 Actual bust: 93 [99: 105: 111: 117: 123: 129: 134] cm, 36 ¾ [39: 41 ¼: 43 ¾: 46: 48 ½: 50 ¾: 52 ¾] in  
 Actual Length to Shoulder: 58 [60: 61: 62: 64: 66: 68: 69] cm, 22 ¾ [23 ¾: 24: 24 ½: 25 ¼: 26: 26 ¾: 27 ¼] in  
 Sleeve Length: 43 [46: 46: 46: 46: 47: 47: 48] cm, 17 [18: 18: 18: 18: 18 ½: 18 ½: 19] in

**Materials**  
 Rico Design Creative Melange DK:  
 Shade 013 X 6[6:6:7:7:8:8] x 50 gm balls  
 3.5mm and 4mm (UK 8) knitting needles  
 Cable Needle (CN)  
 2 stitch holders/4 split ring place markers

**Tension**  
 22 sts and 28 rows to a 10 cm (4 in) square in Stocking Stitch (st st) with 4mm needles. 26 sts and 28 rows to a 10 cm (4 in) square in Cable Pattern with 4mm needles.


**Abbreviations**  
 st/sts – stitch/stitches  
 RS/WS- right side/wrong side  
 K/p- knit/purl  
 Rep/patt – repeat/pattern  
 C4F – cable 4 sts front: slip the next 2 sts onto a CN and hold at the front, k2, then k2 from the CN.  
 C4B – cable 4 sts back: slip the next 2 sts onto a CN and hold at the back, k2, then k2 from the CN  
 C8F – cable 8 sts front: slip the next 4 sts onto a CN and hold at the front, k4, then k4 from the CN.  
 C8B – cable 8 sts back: slip the next 4 sts onto a CN and hold at the back, k4, then k4 from the CN

K2tog – knit 2 sts together  
 Skpo – slip one stitch knitwise, k1, pass slipped stitch over  
 Yfwd – yarn forward  
 Dec 1 st – decrease 1 st: Worked on a RS row, work k2, skpo at the beg of a row and a k2tog, k2 at the end of a row, and on a WS row, work p2, p2tog at the beg of a row, and a p2tog tbl, p2 at the end of a row.  
 Inc in first/last stitch – knit into the front and back of a stitch if the stitch to be worked is a knit stitch, purl into the front and back of a stitch if the stitch to be worked is a purl stitch  
 M1 - Make one stitch: use the bar between the stitch you have just knitted and the one you are just about to knit. Pick it up with the left needle from front to back. Knit into the back of this stitch to create a new stitch.  
 P2tog tbl – purl 2 sts together through the back of the loop

**Pattern Stitches**  
**Garter Stitch (g st)**  
**All rows:** Knit.

**Stocking Stitch (st st)**  
**Row 1 (RS):** Knit.  
**Row 2:** Purl.

**Cable Panel**  
**Worked over 30 sts and 16 rows.**  
**Row 1 (RS):** Knit.  
**Row 2 and all WS rows:** Purl.  
**Row 3:** K3, C4B, k6, C8B, k2, C4F, k3.  
**Row 5, 9 and 13:** Knit.  
**Row 7:** K1, C4F, k20, C4B, k1.  
**Row 11:** K3, C4B, k6, C4B, k6, C4F, k3.  
**Row 15:** Repeat row 7.  
**Row 16:** Purl.

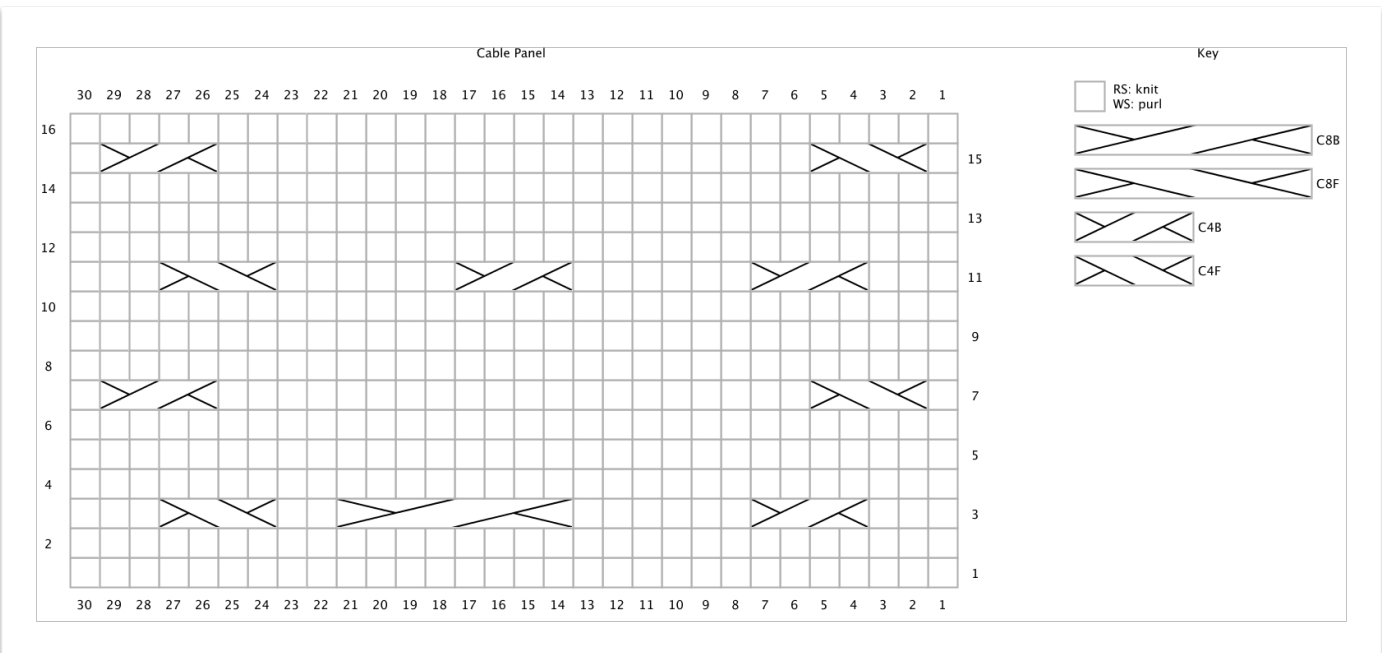

## Instructions

### Back.

\*\*Using 3.5mm (US 4) needles, cast on 90[96:102:108:112:118:124:130] sts. Work in g st for 2 cm.

Change to 4mm needles and work the following increase row:

**Next row (RS) (inc):** (K3, M1, k2, M1) four times, k9[7:10:7:10:6:9:6], \*M1, k5[6:5:6:5:6:6:6]: rep from \* to last 6[3:7:3:7:2:5:2] sts, M1, k to end.

110[116:124:130:136:142:148:156] sts.

**Next row (WS):** Purl.

Work in Cable Panel and stocking stitch as follows:

**Row 1 (RS):** Cable Panel row 1 across 30 sts, k to end.

**Row 2:** P to last 30 sts, Cable Panel row 2 across 30 sts.

These 2 rows set the position of the patterns: the first 30 sts worked in Cable Panel, and the remaining 80[86:94:100:106:112:118:126] sts worked in st st (k on the RS and p on the WS).

Cont in patt as set till work measures 35[36:36:36:37:38:39:40] cm, ending with a WS row and measured from the cast on edge. \*\*

Place a marker at the beg and end of the next row to indicate the start of the armholes and cont in patt till work measures 55[57:58:59:61:63:65:66] cm, ending with a WS row and measured from the cast on edge.

Shape Shoulders.

Pattern note: Because there are more stitches to the cable panel, the shoulder cast off stitches are not equal.

**Row 1 (RS):** Cast off 6[6:7:7:8:8:9:10] sts, patt to end.

**Row 2:** Cast off 5[6:6:7:7:8:8:9] sts, patt to end.

**Row 3:** Cast off 6[7:7:8:8:9:9:10] sts, patt to end.

**Row 4:** Cast off 5[6:6:7:7:8:8:9] sts, patt to end.

**Row 5:** Cast off 6[7:7:8:8:9:9:10] sts, patt to end.

**Row 6:** Cast off 6[6:7:7:8:8:9:9] sts, patt to end.

**Row 7:** Cast off 7[7:8:8:9:9:10:10] sts, patt to end.

**Row 8:** Cast off 6[6:7:7:8:8:9:9] sts, patt to end.

**Row 9:** Cast off 7[7:8:8:9:9:10:10] sts, patt to end.

**Row 10:** Cast off 6[6:7:7:8:8:9:10] sts, patt to end.

Put the rem 50[52:54:56:56:58:58:60] sts onto a holder.

### Front

Work \*\* to \*\* as for the Back.

Place a marker at the beg and end of the next row to indicate the start of the armholes and cont in patt till work measures 49[51:52:53:54:56:58:59] cm, ending with a WS row and measured from the cast on edge.

Shape Left Neckline.

**Next row (RS):** pattern 42[44:47:49:52:55:58:61], turn and put the rem sts onto a holder. Work with these 42[44:47:49:52:55:58:61] sts.

Cont in patt as set and dec 1 st at the neck edge on the next 4 rows.

Work one row straight then dec 1 st at the neck edge on the next row, a RS row, and every RS row till 32[34:37:39:42:44:47:50] sts remain. Work straight in patt as set till work measures the same as the Back to the Shoulder and ending with a WS row.

Shape shoulders

Pattern note: Because there are more stitches to the cable panel, the shoulder cast off stitches are not equal.

**Row 1 (RS):** Cast off 6[6:7:7:8:8:9:10] sts, patt to end.

**Row 2 and all WS rows:** Patt as set.

**Row 3:** Cast off 6[7:7:8:8:9:9:10] sts, patt to end.

**Row 5:** Cast off 6[7:7:8:8:9:9:10] sts, patt to end.

**Row 7:** Cast off 7[7:8:8:9:9:10:10] sts, patt to end.

**Row 9:** Cast off 7[7:8:8:9:9:10:10] sts.

Shape Right Neckline.

With RS facing, leave the central 30[32:34:36:36:36:36:38] sts on the holder, join yarn at the neck edge and patt to end. 38[40:43:45:48:51:54:57] sts.

Cont in patt as set and dec 1 st at the neck edge on the next 4 rows.

Work one row straight then dec 1 st at the neck edge on the next row, a RS row, and every RS row till 28[30:33:35:38:40:43:46] sts remain. Work straight in patt as set till work measures the same as the Back to the Shoulder and ending with a RS row.

Shape Shoulders.

Pattern note: Because there are more stitches to the cable panel, the shoulder cast off stitches are not equal.

**Row 1 (WS):** Cast off 5[6:6:7:7:8:8:9] sts, patt to end.

**Row 2 and all RS rows:** Patt as set.

**Row 3:** Cast off 5[6:6:7:7:8:8:9] sts, patt to end.

**Row 5:** Cast off 6[6:7:7:8:8:9:9] sts, patt to end.

**Row 7:** Cast off 6[6:7:7:8:8:9:9] sts, patt to end.

**Row 9:** Cast off 6[6:7:7:8:8:9:10] sts.

### Right Sleeve

#### Stocking Stitch

With 3.5mm (US 4) needles, cast on 47[47:49:49:51:51:55:55] sts. Work in g st for 2 cm.

Change to 4mm needles and work inc row as follows:

**Next row 1 (RS):** K2[2:3:3:4:4:3:3] sts, \*M1, k7[7:7:7:7:8:8]:  
rep from \* to last 3[3:4:4:5:5:4:4] sts, M1, k to end.  
54[54:56:56:58:58:62:62] sts.

Starting with row 1, work in st st for 4 rows.

Cont in st st as set and work the first sleeve increase on the next row as follows:

**Next row (RS) (inc):** K2, M1, k to last 2 sts, M1, k2. (inc of 2 sts)

Rep this inc row every foll 6<sup>th</sup>[6<sup>th</sup>:6<sup>th</sup>:6<sup>th</sup>:4<sup>th</sup>:4<sup>th</sup>:4<sup>th</sup>] row till there are 86[88:90:94:100:104:106:108] sts, working increased sts in st st as set.

Work straight till sleeve measures 43[46:46:46:46:47:47:48] cm, measured from the cast on edge and ending with a WS row.

Shape Sleeve Cap.

Cast off 29[29:30:31:33:35:35:36] sts at the beg of the next 2 rows. Cast off rem sts.

## Left Sleeve

### Stocking Stitch with Cable Panel

With 3.5mm (US 4) needles, cast on 47[47:49:49:51:51:55:55] sts. Work in g st for 2 cm.

Change to 4mm needles and work inc row as follows:

**Next row 1 (RS):** K2[2:3:3:3:3:3:3] sts, (M1, k4[4:4:4:4:4:5:5]) twice, M1, k2[2:2:2:3:3:3:3], k2, (M1, k3) 7 times, k2[2:3:3:3:3:3:3] sts, (M1, k4[4:4:4:4:4:5:5]) twice, M1, k2[2:2:2:3:3:3:3]. 60[60:62:62:64:64:68:68] sts.

**Next row:** Purl.

Work in st st and 30 st cable panel pattern as follows:

**Row 1 (RS):** K15[15:16:16:17:17:19:19], 30 st Cable Panel row 1 across 30 sts, k15[15:16:16:17:17:19:19].

**Row 2:** P15[15:16:16:17:17:19:19], 30 st Cable Panel row 2 across 30 sts, p15[15:16:16:17:17:19:19].

These 2 rows set the position of the patterns: the side 15[15:16:16:17:17:19:19] sts worked in st st and the central 30 sts worked in 30 st Cable Panel.

Work 2 more rows in patt as set.

Cont in patt as set and work the first sleeve increase on the next row as follows:

**Next row (RS) (inc):** K2, M1, k to last 2 sts, M1, k2. (inc of 2 sts)

Rep this inc row every foll 6<sup>th</sup>[6<sup>th</sup>:6<sup>th</sup>:6<sup>th</sup>:6<sup>th</sup>:4<sup>th</sup>:4<sup>th</sup>:4<sup>th</sup>] row till there are 92[94:96:98:104:108:112:114] sts, working increased sts in patt as set.

Work straight till sleeve measures 43[46:46:46:46:47:47:48] cm, measured from the cast on edge and ending with a WS row.

Shape Sleeve Cap.

Cast off 31[31:32:33:35:36:37:38] sts at the beg of the next 2 rows. Cast off rem sts.

## To make up

Weave in ends and block pieces lightly.

Neckline.

Sew left shoulder seam. With RS facing, 3.5mm needles and starting at the Back, knit the 50[52:54:56:56:58:58:60] sts from the Back holder, pick up and knit 19[19:19:19:20:21:21:21] sts across the left front neck, knit the 30[32:34:36:36:36:36:38] sts from the Front holder and pick up and knit 19[19:19:19:20:21:21:21] sts along the right front neck. 118[122:126:130:132:136:136:140] sts.

Knit 6 rows, ending with a RS row. Cast off on the WS.

Sew right shoulder and neckband. Sew sleeve caps into armholes between markers. Sew sleeve and side seams. Weave in any other ends. See ball band for further care instructions.