




PETEK PHONECASE

Designed for Urth Yarns by Ece Esin

- Materials:** Urth Uneek Worsted, about 20-30g per case,
- Sizes:** 1(2, 3), customizable
- Dimensions:** 5(6.25, 6.25)"/13(16, 16)cm height
x 3(3.25, 4)"/8(8.5, 10)cm width, to fit with some negative ease
- Hook:** US D-3/3.25 mm
- Notions:** Tapestry needle
- Gauge:** 26.5 sts x 18 rows in Half Double Crochet Moss Stitch = 4"/10 cm square

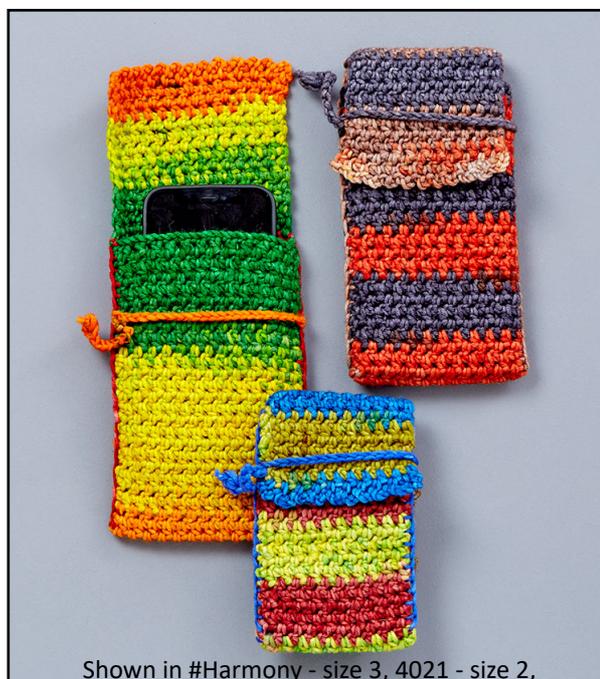

Shown in #Harmony - size 3, 4021 - size 2, 4004 - size 1; clockwise, starting at the left top

Abbreviations:

(this pattern uses US crochet terms)

Bet — Between

Ch — Chain

Hdc — Half double crochet

EOR — End of row/round

Foll — Follow(s/-ing)

Rep — Repeat

Rnd(s) — Round(s)

RS — Right side

Sk — Skip

Sl — Slip

St(s) — Stitch(es)

YO — Yarn over

WS — Wrong side

Special Stitches:


Slip Stitch: Insert hook into the loop of the st below, yo, draw through 2 loops on the hook.

Half Double Crochet: Yo, insert hook into the loop of the st below, yo, pull up a loop, yo, draw through 3 loops on the hook.

Half Double Crochet Moss Stitch:

Row 1: Ch an even number of stitches. Hdc into the 4th ch from the hook, *ch 1, sk 1 ch/st, work a hdc into the next ch/st*, rep bet * to 1 st bef EOR, hdc 1, ch 2, turn.

Row 2: *1 hdc into the ch space, ch 1, sk the next hdc, hdc 1 into the next chain space*, rep bet * to EOR, turn.

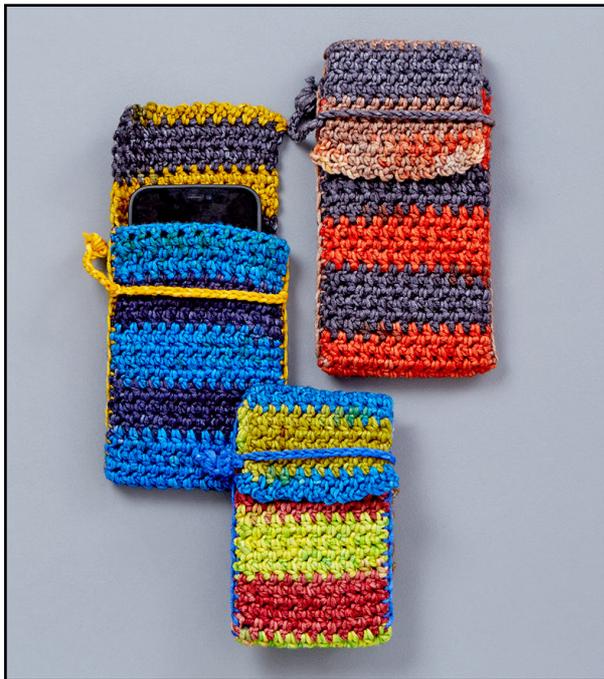

Shown in Urth Uneek Worsted 4015 - size 2, 4021 - size 2, 4004 - size 1, starting at the left top

Blanket Stitch:

Used for sewing the sides together. Thread a tapestry needle with a length of contrasting yarn and make a knot at the tail end. Starting between the two layers, push your needle down through bottom layer, securing your knot in between the two layers. This should be done as close as possible to the edge, to allow evenly connecting the two sides of your project. Insert the needle up through the top layer, then down through the bottom layer at the same spot where the yarn was anchored, making a loop.

Insert your needle through this loop sideways along the space between the two layers. This anchors the yarn, but is not a

true first stitch. To make the first blanket stitch, insert your needle down from the top about 1/4"/0.5cm over from where the yarn first came up, bring the needle up from the back, and through the loop of thread. The needle should be positioned in a straight line down. Before pulling the stitch tight, make sure your needle goes over the loop of yarn. Repeat this process to the end of the seam, keeping your stitches placed evenly in a straight row. Anchor the yarn in place.

Puff Stitch: Yo, insert hook into the loop of the st below, (yo, pull up a loop) four times, yo, draw the yarn through all loops on the hook at once; yo, pull through the 1 remaining loop.

Pattern Notes:

The Petek phonecase is crocheted with an easy, beginner-friendly Half Double Crochet Moss Stitch. It's first worked flat, then the sides are sewn together using a Blanket Stitch. Finally, a strap to hold the flap closed is added, as well as a decorative tie finished with a puff stitch.

The 3 sizes provided can be easily customized to fit any phone by adjusting the st and row counts.

Width - adjust the starting ch by multiples of 2, each equals approx. 0.25"/0.75 cm.

Height - adjust the number of rows worked, each 2 rows equal approx. 0.4"/1 cm.

Turning chains or slip stitches used for joining are not included in stitch counts.

Pattern:

Ch 19(21, 25) + 3 turning ch.

If you wish to adjust width, change the starting ch number by increments of 2.

Row 1(RS): Sk 3 ch, hdc into the 3rd chain from the hook, *ch 1, sk 1 ch, hdc 1 into the next st*, rep bet * to last st bef EOR, 1 hdc into the last st, ch 2, turn - 10(11, 13)hdc total.

Row 2: *Ch1, sk the next hdc, hdc 1 into the ch space (between the hdcs)*, rep bet * to EOR, ch 2, turn - 10(11, 13)hdc total. Rep Row (2) 60(70, 70) more times - until work measures 13.5(15.75, 15.75)''

/34.5(40, 40)cm. If you wish to adjust height, add or subtract rows here.

Finishing:

Work the trim on the flap edge as foll:

Row 1: Ch 1, *sl st into the 1st ch space, ch 3*, rep to last ch space bef EOR, sl st 1.

Assemble the case:

Lay the piece flat with the WS facing, flap trim towards the top.

Fold the bottom 5(6.25, 6.25)''/13(16, 16)cm towards the middle to form the case, seam up the sides with blanket stitch. The flap should be approximately half the length of the main body.

Make the strap:

Holding the flap closed, insert the hook from the back to the front at the edge of the case, 5 rows or 0.75''/2 cm down from the front opening, connecting both layers of the case.

Attach a new strand of yarn.

Pull up loop, ch 20, sl st to join the strap to the other edge through both front and back layers.

Ch 10, 1 puff stitch into the last ch. Cut yarn, pull tight to secure.

Weave in all ends.

Schematic: